


D-R 320 Dust monitor

Continuous dust measurement for small to medium concentrations

- QAL1 certified in accordance with EN 15267
- Compliant with US EPA 40 CFR 60 PS 11
- Contactless measurement with single-sided installation

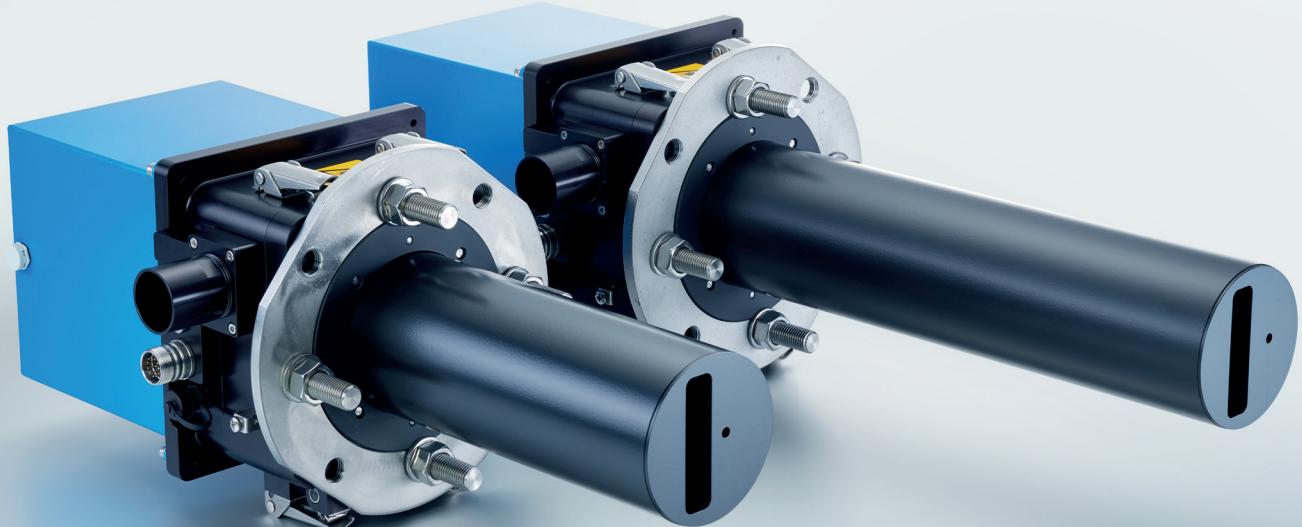

FEATURES

- Continuous dust measurement
- Smallest certified measuring range 0 ... 7.5 mg/m³
- Single-sided installation without optical alignment
- Automatic control functions
- Continuous integrated purge air monitoring and control
- Maintenance and linearity check without disassembly

BENEFITS

- Suitable for official emission monitoring
- Reliable measurement of small dust concentrations
- Space-saving and easy installation
- Long life time and high availability under extreme plant conditions
- Low maintenance

TECHNICAL DATA

| | |
|-------------------------------------|---|
| Measuring principle | Backward scattering, in-situ, continuous, single-sided installation, contactless measurement |
| Measuring variable | Scattered light units, calibratable as dust concentration in mg/m ³ |
| Measuring range | Minimum 0 ... 5 mg/m ³ Maximum 0 ... 200 mg/m ³ |
| Certified measuring range | 0 ... 7.5 mg/m ³ |
| Certificates | QAL1, MCERTS |
| Conformities | IED 2010/75/EU, EN 15267-1, EN 15267-2, EN 15267-3, EN 14181, US EPA 40 CFR 60 PS 11, 13th / 17th / 27th / 30th BImSchV, TA Luft |
| Interface* | <ul style="list-style-type: none"> Analogue output: 1x 4 ... 20 mA, maximum 400 Ω, potential-free (various parameters adjustable) Digital output: 2x NC/NO, maximum 60 V~, 30 V~, 0.5 A (various parameters adjustable) RS 485 Modbus RTU, USB |
| Nominal voltage | 24 V~ |
| Ambient conditions | <ul style="list-style-type: none"> Installation location: Indoor or outdoor installation** Temperature: -40 ... +60 °C -30 ... +60 °C (ATEX) -20 ... +60 °C (IECEx) |
| Operating conditions in duct | <ul style="list-style-type: none"> Temperature: Maximum 600 °C Relative humidity: 0 ... 95%, non-condensing Relative pressure: -50 ... +50 hPa -50 ... 0 hPa (ATEX/IECEx) |


| | |
|------------------------------|--|
| Duct dimensions | <ul style="list-style-type: none"> Inner diameter: >0.7 m Wall thickness: Maximum 0.56 m |
| Control functions | Automatic zero point and reference point measurement, automatic contamination measurement and compensation, integrated purge air monitoring and control |
| Protective functions | Integrated fail-safe shutter (optional) |
| Degree of protection | IP65 in accordance with DIN EN 60 529 |
| Light source | Laser, class 2 in accordance with DIN EN 60825-1, < 1 mW at 650 nm |
| Connections | <ul style="list-style-type: none"> Process: Flange, rotatable, DN100 PN6/ANSI 4" 150 lbs RF Device: M23 DURAG Standard Purge air hose: Ø 40 mm Purge air sensor: M12 8-pin |
| Explosion protection | <ul style="list-style-type: none"> ATEX (optional): II 2G Ex px op is IIC T4 Gb II 3G Ex pz op is IIC T4 Gc II 3D Ex pD III T70 °C DC IECEx (optional): Ex pzc IIC T4 Gc |
| Display and operation | <ul style="list-style-type: none"> Status display: LED D-ESI 100 software*** or D-ISC 100 operating unit |
| Material | <ul style="list-style-type: none"> Process aperture: 1.4301, AISI 304, coated Housing: 1.4571, AISI 316Ti, painted |
| System components | <ul style="list-style-type: none"> D-R 320 dust monitor D-ESI 100 software*** D-TB 200 Terminal Box or D-TB 100 Terminal Box (external purge air supply required) or D-ISC 100 P operating and purge air unit |

* Additional interfaces with D-ISC 100 operating unit

** A weather protection cover is required for outdoor installation

*** Enables remote access via web interface, requires PC with Windows operating system


D-R 320 | DIMENSIONS AND WEIGHT OF DIFFERENT PRODUCT VARIANTS

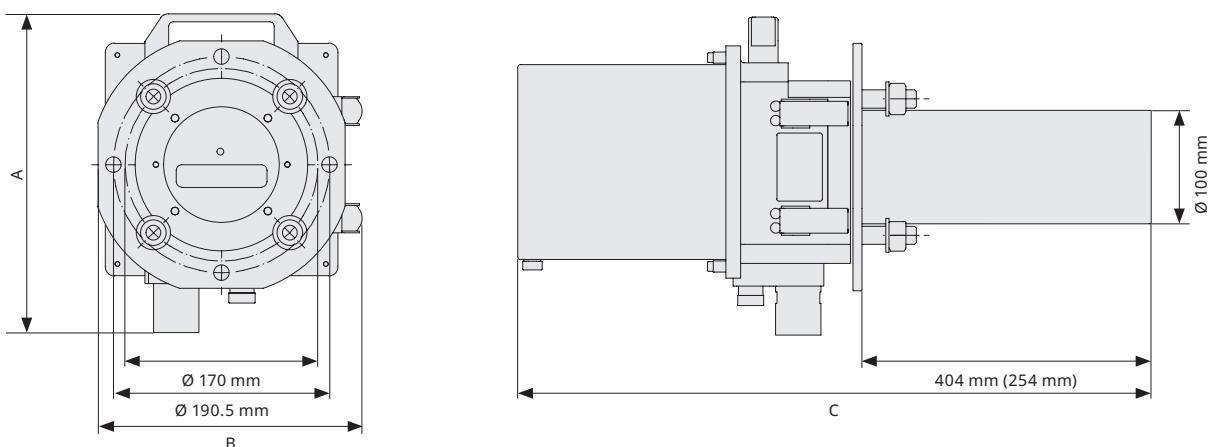

| Product variant | | A (mm) | B (mm) | C (mm) | Weight |
|------------------------|----------|--------|--------|--------|---------|
| Process aperture short | Standard | 281 | 233 | 559 | 14.4 kg |
| | ATEX | 443 | 233 | 654 | 17.9 kg |
| | IECEx | 358 | 364 | 654 | 17.9 kg |

| Product variant | | A (mm) | B (mm) | C (mm) | Weight |
|-----------------------|----------|--------|--------|--------|---------|
| Process aperture long | Standard | 281 | 233 | 709 | 15.3 kg |
| | ATEX | 443 | 233 | 804 | 18.8 kg |
| | IECEx | 358 | 364 | 804 | 18.8 kg |

EXAMPLES OF SYSTEM CONFIGURATIONS* | STANDARD + OPTIONAL WITH REMOTE ACCESS

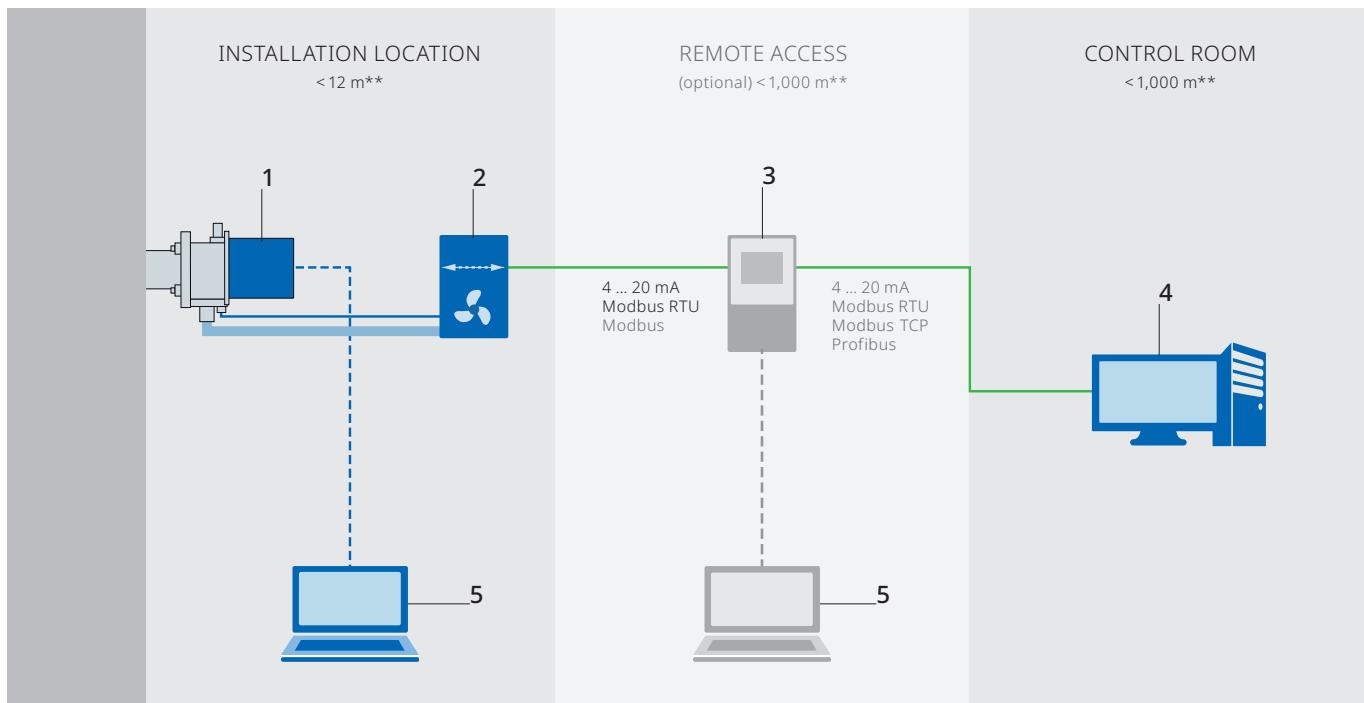

1 Dust monitor
 2 Terminal Box
 with/without purge air unit

3 Operating unit
 4 Emission evaluation system
 5 PC with Windows operating system
 and software

* All system components shown are available on request

** Maximum permitted cable and hose length

DURAG GROUP

Kollaustr. 105
22453 Hamburg, Germany
Phone +49 40 554218-0
info@durag.com

DURAG.COM